


# Manual For Mini Tactical Spec Reflex Sight

This Mini Tactical Spec Reflex Sight is lightweighted, compact and accurately designed to provide a wide field of view while shooting. Specially it is designed to view with both eyes open to maintain all-important peripheral vision and depth perception. This features a digital switch with five reticle brightness settings. Two locking screws make it able to withstand heavy recoil. It's perfect for shotguns, rifles and pistols.

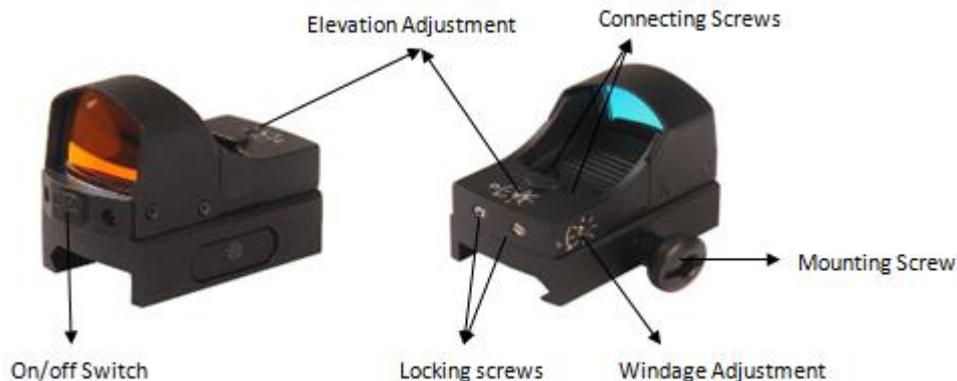

## FEATURES:

- 6 brightness settings.
- 3.5 MOA dot.
- Parallax corrected for precision accuracy.
- Wide field of view.
- Low power consumption.
- Lightweight.
- Shockproof.
- Weatherproof.

## BATTERY INSTALLING

- 1) Use the Allen wrench (provided in package) to unscrew the connection screws(6).
- 2) Turn upper part(body) upside down to remove the weaver base.
- 3) Remove the battery and insert the new one (1xCR2032) with the positive (+) side upwards.
- 4) Place the body back on the base and screw the connection screws (6) until fix firmly.

## MOUNTING

- 1) Simply unscrew the mounting screw-nut (5), this will loosen the mount.
- 2) Confirm unit is sitting on top of the rail and the mounting bolt is located in the rail's groove.
- 3) Tighten the mounting screw-nut (5) firmly.

## WINDAGE AND ELEVATION ADJUSTMENT

- 1) Before any windage and elevation adjustments is made, loosen the locking screws (7) on the

back of the unit.

**WARNING:** Adjustment to the windage and elevation screws without loosening the locking screws (7) may lead to damage to the unit.

- 2) Adjust the elevation and windage (2 and 3) with the flat head screwdriver till the reticle is zeroed on the bullet's point of impact.
- 3) Once the reticle is zeroed in, tighten the locking screws (7). A small amount of removable thread locker can be applied to the locking screws.

#### **MAINTENANCE & STORAGE**

- Proper maintenance of unit is recommended to ensure longevity. It is recommended that the unit needs wiping with a dry or slightly damp cloth when it becomes dirty,
- Blow dirt and debris off all optics and then clean lenses with a lens cleaning cloth.
- Make sure that your unit is securely attached to your rifle before storing and be sure that the unit is turned off.
- Remove the battery from the unit if the unit will be stored for an extended period of time.

#### **TECHNICAL SPECIFICATIONS:**

Reticle type	3.5 MOA dot
Reticle color	Red
Reticle brightness	1-6 step and off
Magnification	1x
Objective lens size	23x16mm
Eye relief	unlimited
Field of view (m@100m)	15.7
Parallax free (@meters)	9m to ∞
Windage/elevation MOA	144/180
Maximum recoil (G's)	1000
Battery life (high step)	1000 hrs
Water proof IP standard	IPX4
Body material	aluminum
Mount type	Weaver/picatinny
Operation temperature	-20°C ~ +60°C
Dimensions	47x30x39mm
weight	60g

