


# Manual for Mini Tactical Spec Reflex Sight

This Mini Tactical Spec Reflex Sight is lightweighted, compact and accurately designed to provide a wide field of view while shooting. Specially it is designed to view with both eyes open in order to maintain all-important peripheral vision and depth perception. This unit features a digital switch with five reticle brightness settings, the function of being able to turn it off automatically within one hour. It's quite perfect for shotguns, rifles and pistols.

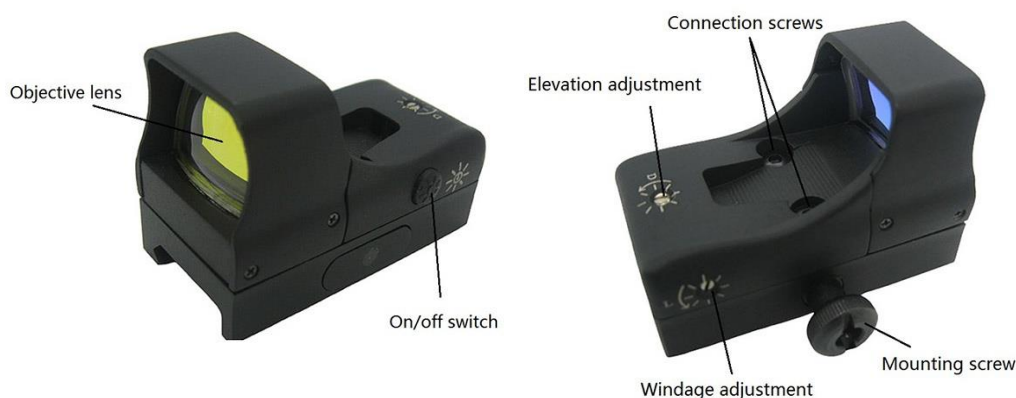

## FEATURES:

- 6 reticle brightness settings
- 3.5 MOA dot
- Parallax correction for accuracy
- Wide field of view
- Low power consumption
- Lightweight
- Shockproof
- To be able to memorize brightness level

(Remark: the unit has memory function for brightness level, e.g.if the sight's brightness is set to level 3 before turn it off, the setting of brightness level is memorized, In next time, when you turn on the sight, the brightness level will be 3.)

## BATTERY INSTALLING

- 1) Use the Allen wrench (provided in package) to unscrew the connection screws.
- 2) Turn the body upside down to remove the weaver base.
- 3) Remove the battery and insert a new one (1xCR2032) with the positive (+) side upwords.
- 4) Place the body on the base and screw the connection screws until it fixed firmly.

## MOUNTING

- 1) Simply unscrew the mounting screw-nut , this will loosen the mount.
- 2) Confirm unit is sitting on top of the rail and the mounting bolt is located in the rail's groove.
- 3) Tighten the mounting screw-nut firmly.

## WINDAGE AND ELEVATION ADJUSTMENT

- 1) Clicking adjustment for windage and elevation adjustment.
- 2) Adjust the elevation and windage with the Allen wrench till the reticle is zeroed on the bullet's impact point .
- 3) Make the reticle zeroed in.

## MAINTENANCE & STORAGE

- Proper maintenance of the unit is necessary to ensure longevity. It is recommended that the unit needs wiping with a dry or slightly damp cloth when it becomes dirty,
- Make sure that your unit is securely attached to your rifle before storing and be sure that the unit is turned off.
- Remove the battery from the unit if the unit will be stored for an extended period of time.

## TECHNICAL SPECIFICATIONS:

Reticle type	3.5 MOA dot
Reticle color	Red
Reticle brightness	1-6 steps and off
Magnification	1x
Size of Objective lens	25x17mm
Eye relief	unlimited
Field of view (m@100m)	15.7
Parallax	$\leq 3'$
Windage/elevation Range	$\pm 20'$
Maximum recoil (G's)	800
Adjustment method	Clicking
MOA Adjustment	1 MOA
Body material	aluminum
Mount type	Weaver/picatinny
Operation temperature	-20°C ~ +60°C
Dimension	49x29x38mm
weight	65g